



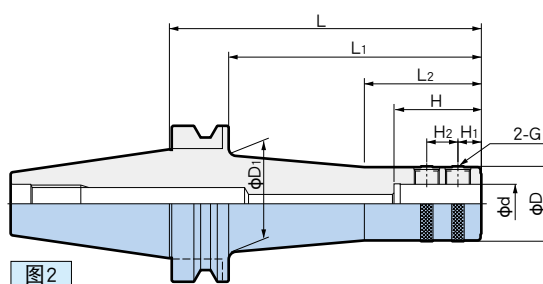

- 型号说明
- BBT30 - T SL 16 - 75
- BBT30: BIG-PLUS BT No.
 - T: 中心内冷
 - SL: 侧固式刀柄
 - 16: 夹持直径
 - 75: L尺寸

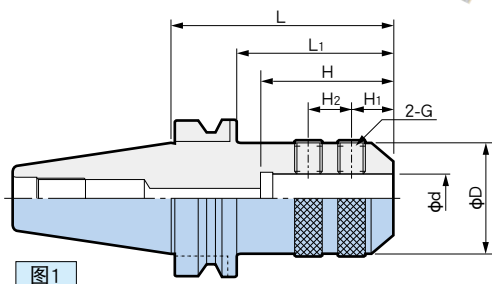

BIG-PLUS (BBT 基础柄) 在 BIG-PLUS 主轴和既有的 BT 主轴上均可使用。

BIG-PLUS BBT基础柄 型号	BT基础柄 型号	图	φd	φD	φD ₁	L	L ₁	L ₂	H	H ₁	H ₂	G	质量 (kg)	
BBT30-TSL16- 75	—	1	16	48	—	75	—	—	48	14	14	M10	1.03	
-TSL20- 75			80			50			0.98					
-TSL25- 80			85			56			0.97					
-TSL32- 85			85			60			1.38					
BBT40-TSL16- 90	BT40-TSL16- 90	1	16	48	—	90	63	—	48	14	14	M10	1.7	
-105	105		78			1.9								
-TSL20- 90	-TSL20- 90		90			63	1.7							
-105	105		78			1.9								
-TSL25- 90	-TSL25- 90		90			63	1.6							
-105	105		78			1.8								
-TSL32-105	-TSL32-105		105			78	2.4							
-135	135		108			3.0								
-TSL40-105	-TSL40-105	105	—	70	15	25	M16	2.4						
BBT50-TSL16- 90	BT50-TSL16- 90	1	16	48	—	90	52	—	48	14	14	M10	4.2	
-135	135					97	4.8							
-165	165					127	5.2							
-200	—	2	—	—	62.5	200	162	75	—	—	—	—	6.1	
-TSL20- 90	-TSL20- 90	1	20	48	—	90	52	—	50	14	14	M10	4.2	
-135	-135					135	97						—	4.8
-165	-165					165	127						—	5.2
-200	—					62.5	200						162	75
-250	—	2	—	—	64	250	212	90	—	—	—	6.8		
-TSL25-105	-TSL25-105	1	25	48	—	105	67	—	56	15	20	M16	4.3	
-135	-135					135	97						—	4.7
-165	-165					165	127						—	5.1
-200	—	2	—	—	—	62.5	200	162	75	—	—	—	5.9	
-250	—					64	250	212	90	—	—	6.7		
-TSL32-105	-TSL32-105	1	32	63	—	105	67	—	60	15	20	M16	4.8	
-135	-135					135	97						—	5.5
-165	-165					165	127						—	6.2
-200	—					200	162						—	6.9
-250	—					250	212						—	8.0
-TSL40-105	-TSL40-105	1	40	68	—	105	67	—	70	15	25	M16	4.8	
-135	-135					135	97						—	5.6
-165	-165					165	127						—	6.4
-200	—					200	162						—	7.3
-250	—					250	212						—	8.6
-TSL50-105	-TSL50-105	1	50	84	—	105	67	—	70	15	25	M16	5.4	
-150	—					150	112						—	7.2

BT 柄型号中“-”记号的无标准品，请选用 BBT 基础柄。